

Product Overview

Description:	Elbow crutch comfortable for long term use
Type:	Open cuff
Tube finish:	Anodised matt 15 microns (μ)
Colours:	Available in natural, black, blue and red colours only
Plastics:	Black
Structure:	"Backbone" of aluminium tube; injection moulded cuff/ handle and polyethylene sundry parts

Classification: ISO 9999


Code: 120306

Conformity: In compliance with
ISO 11334-1 (Elbow Crutch)

Key

1. Cuff Support Line
2. Cuff
3. Foot
4. Leg Section Axis
5. Handle
6. Handle Support Line
7. Front Handle Reference Point
8. Rear Handle Reference Point

- a. Arm Section Length
h. Handle Length
l. Leg Section Length
 α . Support Angle
 β . Grip Angle

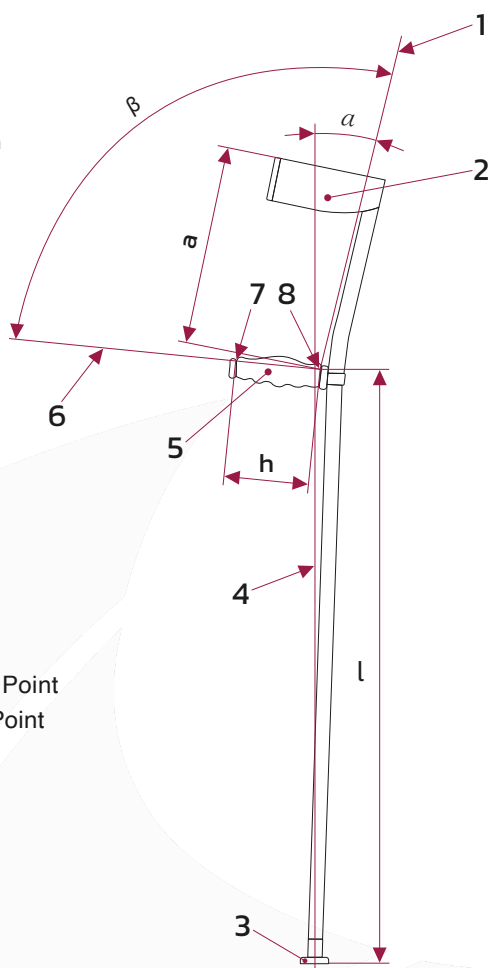

General Information

Support Angle (α)	16°
Grip Angle (β)	103°
Arm Section Length (a)	240mm
Mass	622g / 873g *
Max. Weight of User	120kg / 150kg *
Leg Section Length (l)	1050mm

Fittings

Cuff	Made of polypropylene
Handle	Made of polypropylene Fitted with moulded super soft grip
Foot	Design for maximum adherence Fitted inside with anti-perforation ring Replaceable Fitted with 24mm foot plug at lower end

* Difference between Permanent & Permanent Heavy Duty

Label Details:	Batch No. and Production Date; Maximum Weight = 120kg / 150kg; Name and Address of Manufacturer
Other Indications:	Manufacturer's logo imprinted in cuff
Tolerances:	Allow for approximately 2% deviation of all stated measurements

For more information visit us online or contact us.



www.astrogroup.co.za

Leading Aluminium

SUPPLIER | FABRICATOR | SURFACE FINISHER



Ver 2 (28 Nov 2025)