


- Description:** Elbow crutch comfortable for medium to long term use
- Type:** Open cuff
- Tube finish:** Anodised matt 15 microns (μ)
- Colours:** Available in natural and various matt colours
- Plastics:** Black
- Structure:** "Backbone" of aluminium tube; injection moulded polypropylene cuff / handle and polyethylene sundry parts

Support angle (α):	16°	
Grip angle (β):	103°	
Arm section length (a):	230 mm	
Mass:	Ferrules	
	Smart	Standard
	605 g	585 g
Max. weight of user:	120 kg	

Leg section length adjustment (l):	Adjustable to 10 different lengths (25 mm apart)	
Leg section length (l):	Ferrules	
	Smart	Standard
	703 - 927 mm	703 - 927 mm
Punch:	Single; double by arrangement	

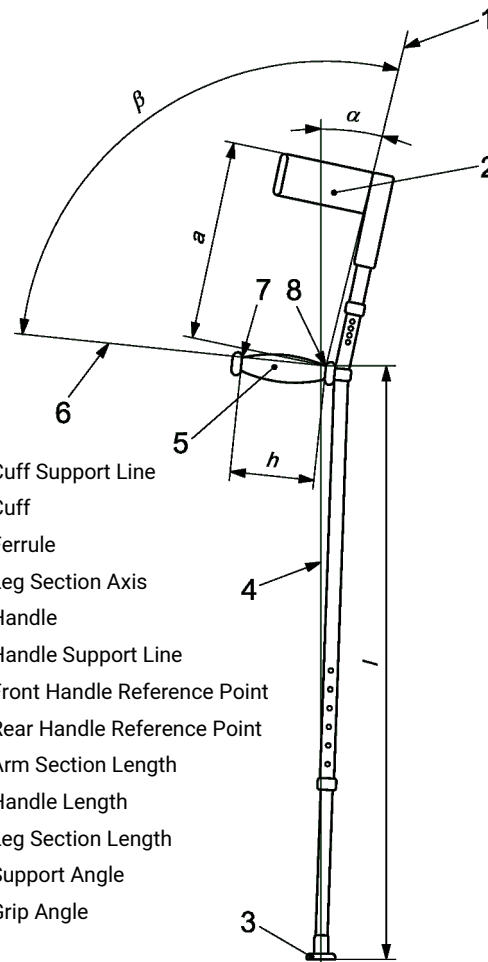

- Key**
- 1 Cuff Support Line
 - 2 Cuff
 - 3 Ferrule
 - 4 Leg Section Axis
 - 5 Handle
 - 6 Handle Support Line
 - 7 Front Handle Reference Point
 - 8 Rear Handle Reference Point
 - a Arm Section Length
 - h Handle Length
 - l Leg Section Length
 - α Support Angle
 - β Grip Angle

Label: Batch No. & Batch production date; Maximum weight = 120 Kg; Name and address of manufacturer

Other Indications: Manufacturer's logo imprinted in cuff

Tolerances: Allow for +/- 2% deviation of all stated measurements

Fittings		
Cuff:	Made of polypropylene	
Handle:	Made of polypropylene	
	Fitted with Supersoft grip (only available on adult crutches)	
Ferrule:	Smart or Standard	
	Designed for maximum adherence. Fitted inside with anti-perforation ring	
	Replaceable	
Upper Tube		
Length:	750 mm	
Outside diameter:	25.4 mm	
Mass:	229 g	
Height adjustment:	X 10 holes	
Plastics:	Fitted with plastic slide at lower end for noise and vibration reduction	
Lower Tube		
Length:	Ferrule	
	Smart	Standard
	470 mm	470 mm
Outside diameter:	21.6 mm	
Mass:	Ferrule	
	Smart	Standard
	170 g	150 g
Height adjustment:	Fitted with plated spring clip	
Plastics:	Fitted with plug at upper end for noise and vibration reduction	
Ferrule:	Fitted with ferrule plug at lower end	