

## Product Overview


<b>Description:</b>	Elbow crutch comfortable for medium to long term use
<b>Type:</b>	Open cuff
<b>Tube finish:</b>	Anodised matt 15 microns ( $\mu$ )
<b>Colours:</b>	Available in natural and various matt colours
<b>Plastics:</b>	Black
<b>Structure:</b>	“Backbone” of aluminium tube; injection moulded cuff/handle and polyethylene sundry parts
<b>Leg adjustment:</b>	Adjustable to 10 different lengths (25mm apart)
<b>Punch options:</b>	Single; or double by arrangement

Classification: ISO 9999  
Code: 120306  
Conformity: In compliance with ISO 11334-1 (Elbow Crutch)

## Key

1. Cuff Support Line
2. Cuff
3. Foot
4. Leg Section Axis
5. Handle
6. Handle Support Line
7. Front Handle Reference Point
8. Rear Handle Reference Point

- a. Arm Section Length  
h. Handle Length  
l. Leg Section Length  
 $\alpha$ . Support Angle  
 $\beta$ . Grip Angle

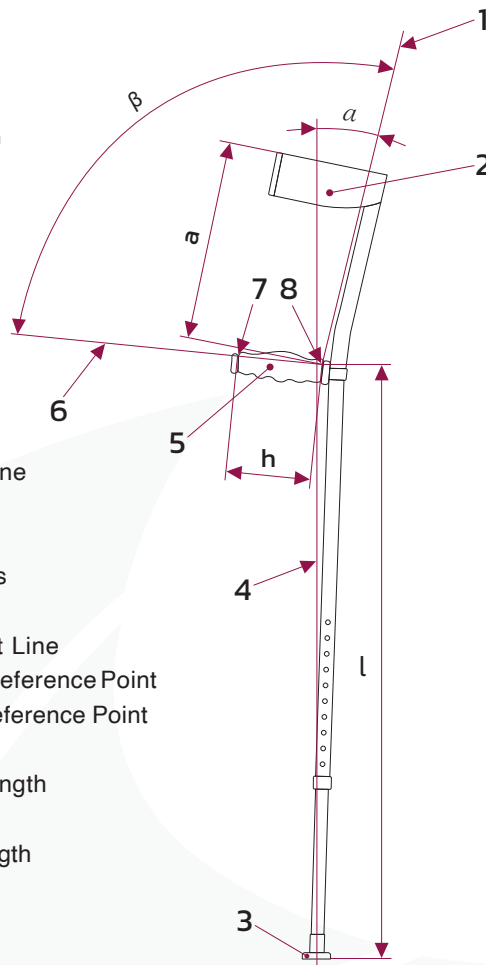

## General Information

<b>Support Angle (<math>\alpha</math>)</b>	16°
<b>Grip Angle (<math>\beta</math>)</b>	103°
<b>Arm Section Length (a)</b>	190mm *
<b>Mass</b>	385g *
<b>Max. Weight of User</b>	60kg *
<b>Leg Section Length (l)</b>	410 - 630mm *

## Fittings

<b>Cuff</b>	Made of polypropylene
<b>Handle</b>	Made of polypropylene Super soft grip on adult only *
<b>Foot</b>	Design for maximum adherence Fitted inside with anti-perforation ring Replaceable

## Upper Tube (Aluminium 6063-T6)

<b>Length</b>	480mm *
<b>Outside Diameter</b>	25.4mm
<b>Mass</b>	146g *
<b>Height Adjustment</b>	X 10 holes
<b>Plastics</b>	Fitted with plastic slide at lower end for noise and vibration reduction

## Lower Tube (Aluminium 6063-T6)

<b>Foot Length</b>	360mm *
<b>Outside Diameter</b>	21.6mm
<b>Mass</b>	115g *
<b>Height Adjustment</b>	Fitted with plated spring clip
<b>Plastics</b>	Fitted with plug at upper end for noise and vibration reduction
<b>Foot</b>	Fitted with foot plug at lower end

\* Different to Adult and Youth Versions

**Label Details:** Batch No. and Production Date; Maximum Weight = 60kg; Name and Address of Manufacturer

**Other Indications:** Manufacturer's logo imprinted in cuff

**Tolerances:** Allow for approximately 2% deviation of all stated measurements

For more information visit us online or contact us.