

Product Overview


Description:	Elbow crutch comfortable for medium to long term use
Type:	Open cuff
Tube finish:	Anodised matt 15 microns (μ)
Colours:	Available in natural and various matt colours
Plastics:	Black
Structure:	"Backbone" of aluminium tube; injection moulded cuff/handle and polyethylene sundry parts
Legadjustment:	Adjustable to 10 different lengths (25mm apart)
Punch options:	Single; or double by arrangement

Classification: ISO 9999
Code: 120306
Conformity: In compliance with
ISO 11334-1 (Elbow Crutch)

Key

1. Cuff Support Line
2. Cuff
3. Foot
4. Leg Section Axis
5. Handle
6. Handle Support Line
7. Front Handle Reference Point
8. Rear Handle Reference Point

- a. Arm Section Length
h. Handle Length
l. Leg Section Length
 α . Support Angle
 β . Grip Angle

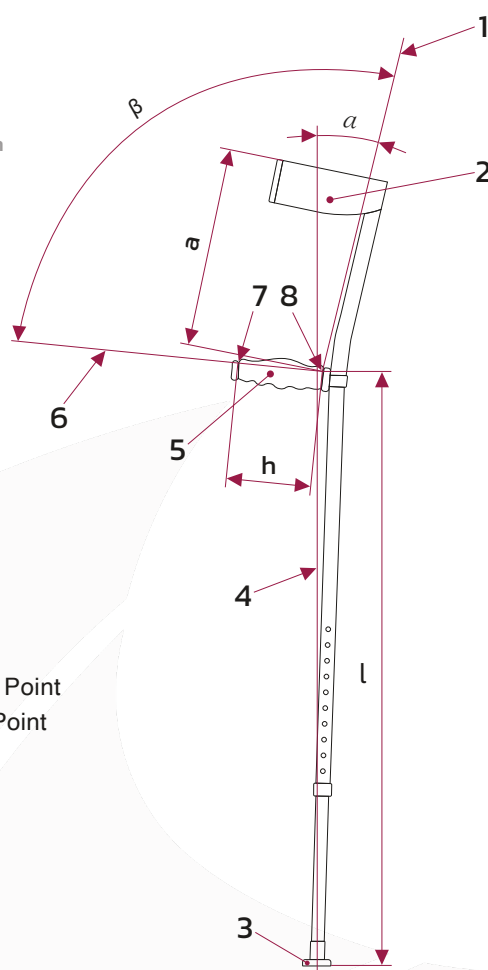

General Information

Support Angle (α)	16°
Grip Angle (β)	103°
Arm Section Length (a)	190mm *
Mass	385g *
Max. Weight of User	60kg *
Leg Section Length (l)	410 - 630mm *

Fittings

Cuff	Made of polypropylene
Handle	Made of polypropylene Super soft grip on adult only *
Foot	Design for maximum adherence Fitted inside with anti-perforation ring Replaceable

Upper Tube (Aluminium 6063-T6)

Length	480mm *
Outside Diameter	25.4mm
Mass	146g *
Height Adjustment	X 10 holes
Plastics	Fitted with plastic slide at lower end for noise and vibration reduction

Lower Tube (Aluminium 6063-T6)

Foot Length	360mm *
Outside Diameter	21.6mm
Mass	115g *
Height Adjustment	Fitted with plated spring clip
Plastics	Fitted with plug at upper end for noise and vibration reduction
Foot	Fitted with 19mm foot plug at lower end *

* Different to Adult and Youth Versions

Label Details:	Batch No. and Production Date; Maximum Weight = 120kg; Name and Address of Manufacturer
Other Indications:	Manufacturer's logo imprinted in cuff
Tolerances:	Allow for approximately 2% deviation of all stated measurements

For more information visit us online or contact us.

